

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
19 May 2005 (19.05.2005)

PCT

(10) International Publication Number
WO 2005/044430 A2

(51) International Patent Classification⁷: B01F
(21) International Application Number: PCT/KR2004/002890
(22) International Filing Date: 9 November 2004 (09.11.2004)
(25) Filing Language: Korean
(26) Publication Language: English
(30) Priority Data:
10-2003-0080357 10 November 2003 (10.11.2003) KR
10-2004-0012431 20 February 2004 (20.02.2004) KR
10-2004-0079740 24 September 2004 (24.09.2004) KR
10-2004-0079741 24 September 2004 (24.09.2004) KR
10-2004-0079725 25 September 2004 (25.09.2004) KR
10-2004-0081155 7 October 2004 (07.10.2004) KR
10-2004-0085989 23 October 2004 (23.10.2004) KR


(71) Applicants and
(72) Inventors: LEE, Jeong-Min [KR/KR]; A-1208, Misung APT., 37, Yeuido-Dong, Youngdungpo-Gu., Seoul 150-887 (KR). LEE, Seong-Jae [KR/KR]; A-1208, Misung APT., 37, Yeuido-Dong, Youngdungpo-Gu., Seoul 150-887 (KR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD AND STRUCTURE FOR MIXING DIFFERENT MATERIALS IN THE POUCH CONTAINER

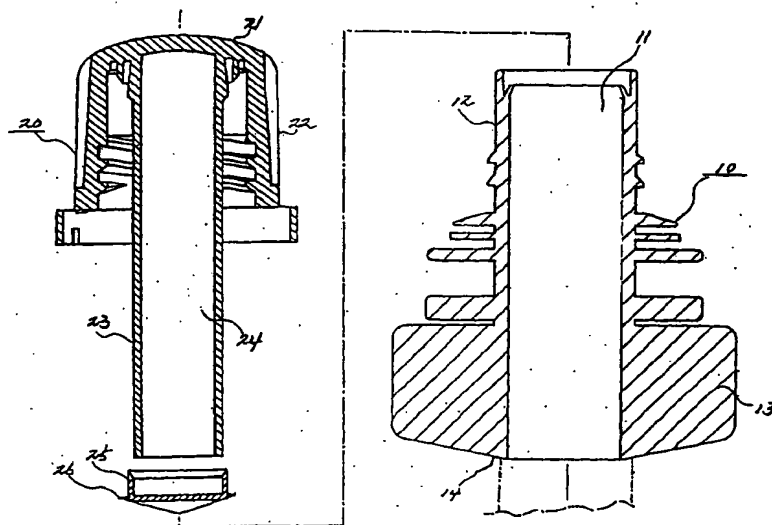

(57) Abstract: A structure for mixing different materials in a pouch container includes a spout main body provided with a spout hole through which mixture of first and second materials is exhausted; a cap removably coupled on an outer portion of the spout hole and storing the first material therein; and a seal member coupled to a lower end of the tube portion.

WO 2005/044430 A2



Published:

— without international search report and to be republished
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.